



Overview

Size (mm)

External Frame	910 × 2065
----------------	------------

Insulation

High Density Polyurethane Foam Insulation

Threshold

Stainless Steel Disability Discrimination Act compliant threshold

Heavy Duty Security Side Door For Shipping Container

Our Heavy Duty Security Side Doors have been designed exclusively for this industry, making them not only secure, but easy to install.

These doors are manufactured with 1mm galvanised steel door skins and 2mm galvanised frames and are supplied wet sprayed with a grey primer finish, so they are ready to be painted immediately after installation. They are supplied wet sprayed with a grey primer finish, so they are ready to be painted immediately after installation.



Door Leaf

Door Depth	45mm Thickness
Material & Gauge	Double skinned 1.0mm galvanised steel
Insulation	High Density Polyurethane Foam Insulation
Int. Strengthening	4mm weld mesh reinforcement

Door Frame



Frame Depth	90mm Depth
Material & Gauge	2.0mm Galvanised steel
Seal	Weather / draught proof seals
Insulation	High Density Polyurethane Foam Insulation

Hinge

Hinge Qty & Type	910 - 3 S/Steel Ball Bearing 1110/1210 - 4 S/Steel Ball Bearing
Anti-Jemmy Studs	4 pcs

Lock

Main Lock	Genuine HOOPLY™ Lock
Top Locks	3 Shoot Bolts
Euro Cylinder	Thumb turn euro cylinder lock
Side Locks	Genuine HOOPLY™ Side Locks

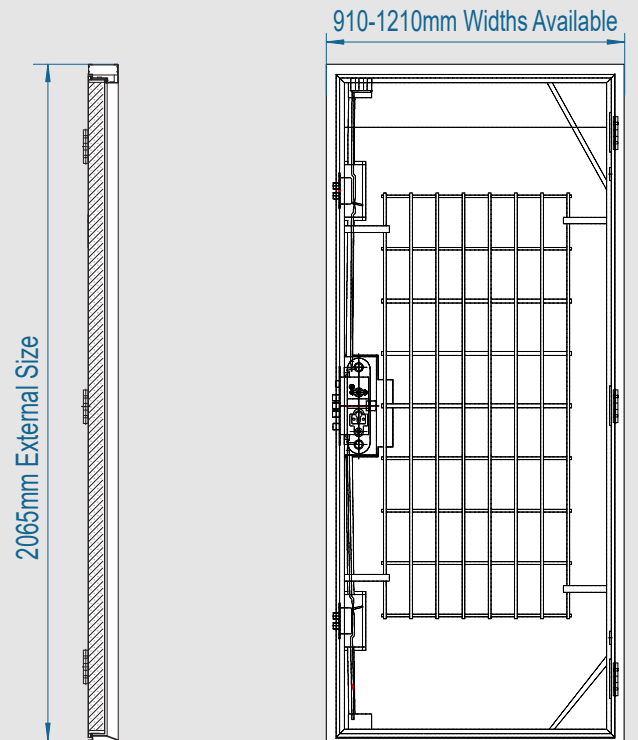

Our doors feature our trademark Genuine HOOPLY® multi point locking system. The locking system is protected with 2mm lock boxes and stainless steel tubes to protect the connecting rods. An adjustable latch keep is integrated into the strike plate and lock box for any final adjustments on-site.

These doors are built to last and come pre-fitted as standard with weather and draught-proof seals. They are also insulated with PU foam, a fully welded frame and sealed joints make for a stiff, rigid door set for easy installation when welding into a shipping container. Wet sprayed with a grey primer finish, designed to take your final paint coat on-site. We recommend painting within 24 hours of install.

Our container doors all comply with the Disability Discrimination Act by having a level stainless steel threshold with a maximum upstand of only 12mm with chamfered edges.

Perfect for container conversions & modifications, site offices & modular buildings where extra security is needed for your property.



For more information please visit our website:
www.lathamsteeldoors.com.au or give us a call on +61 415 310 911