Overview

Size (mm)


External Frame	1490, 1790 x 2095
Finish	White powder coat from stock
Frame Extensions	
Expanding Side Panels	+5-40mm, +50-85mm
Overhead Panels	+25-300mm

Personal Access Door (Double)


Our Double Personnel Access Door are available in a stock sizes of 1490 &1790x2095mm. These doors our industry leading HOOPLY[™] multi-point locking system and an antisnap cylinder is also included as standard.

They are not only secure but also easy to install thanks to our knock-down frame assembly.





Door Leaf	
Door Depth	50mm Thickness
Material & Gauge	1.0mm Galvanised Steel
Insulation	Mineral Wool Insulation
Int. Strengthening	Internal Reinforcement Bars
Door Seal	Nylon Self Adhesive V-Seal
Door Frame	
Frame Depth	90mm Depth
Material & Gauge	1.8mm Galvanised Steel
Frame Seal	Nylon Self Adhesive V-Seal
Fixing Points	10 Fixing Points
Insulation	Mineral Wool Insulation
Hinge	
Hinge Qty & Type	8 Stainless Steel Ball Bearing
Anti-Jemmy Studs	8 pcs
Lock	
Main Lock	Genuine ST8 HOOPLY™ Lock
Top & Bottom Locks	8 Shoot Bolts Top & Bottom
Euro Cylinder	UAP Standard Trade Lock
Side Locks	Genuine HOOPLY [™] Side Locks
Acoustic & Thermal	
Acoustic Value	35dB
U Value	2.20

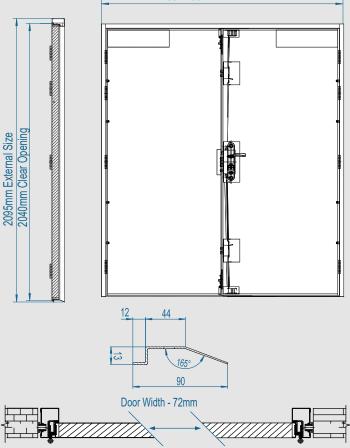

These doors are manufactured from galvanised steel with a fully welded construction, as well as a heavy duty polyester powder coat. They are also fitted with weather and draught-proof seals making our steel doors ideal for both internal and external uses such as garages, shops, commercial premises and modular buildings.

These doors offer an acoustic value of 35dB and a thermal rating (U-value) of 2.20 and include a mineral wool insulation.

If your opening is larger than our stock size we have two frame extension options expanding side frames and over head panels. Easy to fit they help bridge the gap between our stock door sizes and your apeture of required, for the perfect fit.

Customisations Available







For more information please visit our website: www.lathamssteeldoors.com.au or give us a call on +61 415 310 911





1490-1790mm Widths Available