



## Overview

### Size (mm)

External Frame	620, 720, 820, 920, 1020 & 1120 x 2050 Leaf (690, 790, 890, 990, 1090 & 1190 x 2095 Frame)
----------------	--

### Finish

Surfmist white heavy duty powdercoat

### Frame Extensions

Expanding Side Panels	+5-40mm, +50-85mm
-----------------------	-------------------

Overhead Panels	+25-300mm
-----------------	-----------

## Ablution Unit Toilet Door

Our ablution unit toilet doors are exclusively designed for use in shipping container conversions.

Guaranteeing a structurally sound entryway, we include a full subframe, mesh, door closer reinforcing plate and additional corner struts are welded inside the door for additional strength and integrity.

This ensures a rigid door set ready for easy installation into a shipping container.



### Door Leaf

Door Depth	50mm Thickness
Material & Gauge	1.0mm Galvanised Steel
Insulation	Mineral Wool Insulation
Int. Strengthening	Internal Reinforcement Bars
Door Seal	Nylon Self Adhesive V-Seal

### Door Frame

Frame Depth	90mm Depth
Material & Gauge	1.8mm Galvanised Steel
Frame Seal	Nylon Self Adhesive V-Seal
Fixing Points	10 Fixing Points
Insulation	Mineral Wool Insulation

### Hinge



Hinge Qty & Type	4 Stainless Steel Ball Bearing
Anti-Jemmy Studs	4 pcs

### Lock

Main Lock	Genuine ST8 HOOPLY™ Lock
Top & Bottom Locks	3 Shoot Bolts Top & Bottom
Euro Cylinder	UAP Standard Trade Lock
Side Locks	Genuine HOOPLY™ Side Locks

### Acoustic & Thermal

Acoustic Value	35dB
U Value	2.20W/m2.k

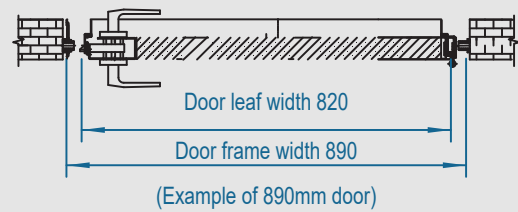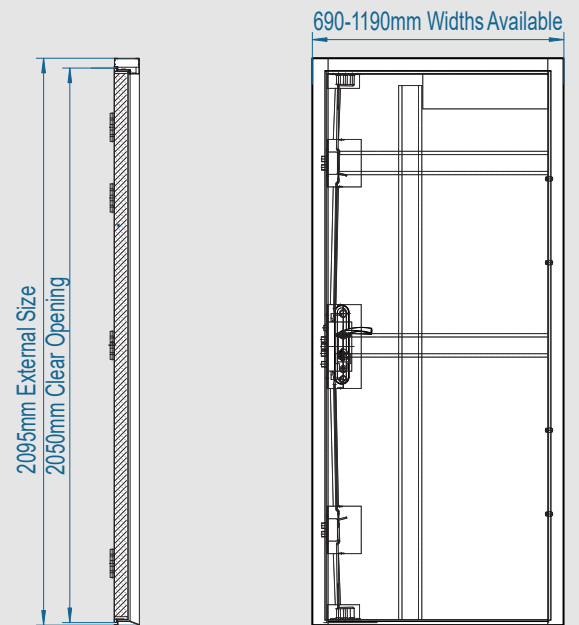


Built with a strong and resilient tolerance, our doors are built to accommodate ease of movement and work on uneven surfaces, all while maintaining their superior functionality.

Our doors include Polyurethane foam (PU foam) offering outstanding insulation and are wet sprayed with a grey primer finish for a hassle-free on-site painting.

The level threshold, which is of stainless steel manufacture, has a maximum upstand of only 12mm and chamfered edges.

- Toilet indicator handle included
- Radar Lock Handle option
- PU foam insulated door & frame
- S/Steel ball bearing hinges

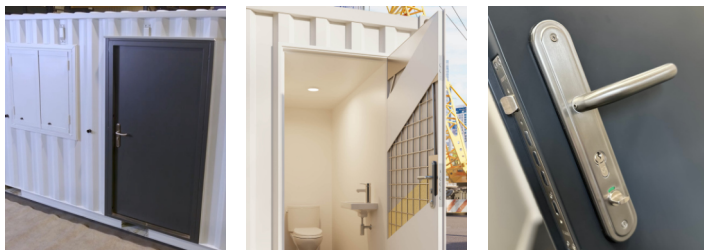

For more information please visit our website:  
[www.lathamsteeldoors.com.au](http://www.lathamsteeldoors.com.au) or give us a call on +61 415 310 911