

Overview

Size (mm)

Panel Size (mm) 623×720 Leaf
(677×733 Frame)

Lock Tyoe Flush Lock

COLORBOND® Options Surfmist White

Fixing/Installation Pre-drilled holes with screws to fix to RHS frame

Container Access Hatch

Simple, easy fit steel container access hatch perfect for shipping container modifications. Made from galvanised steel, they are pre-hung in the frame ready to face fix install in an RHS frame.

Supplied pre-fitted with a flush lock, and finished in Surfmist White.

Tested and certified to Region D rating – AS/NZS 1170.2:2011.



Door Leaf

Door Depth 35mm Thickness

Material & Gauge 0.8mm galvanised steel

Insulation High Density Polyurethane Foam Insulation

Door Frame

Frame Depth 80mm Depth


Material & Gauge 1.4 mm Galvanised steel

Hinge

Hinge Qty & Type 3 Stainless Steel Butt Hinges

Lock


Main Lock Flush Lock

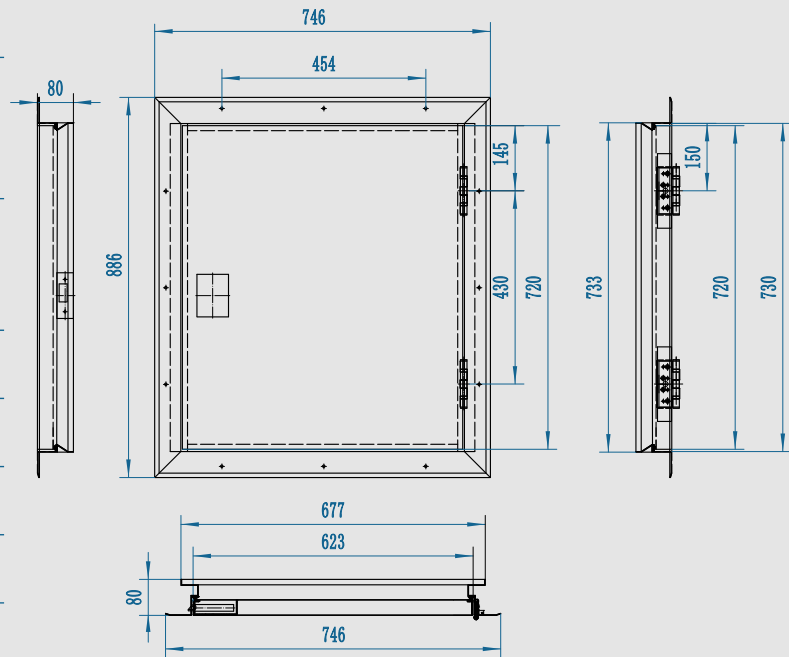

Our container access hatches are perfect for container conversions and modifications. Made from galvanised steel, they have a fully welded frame with sealed joints and very simple to face fix into a shipping container.

They are made of 0.8mm galvanised steel door skins and 1.4mm galvanised frames. Polyurethane foam (also known as PU foam) is injected into the hatch leaf for increased insulation and rigidity, and two stainless steel hinges hold the leaf in the frame. To avoid racking, an increased tolerance has also been factored in.

Supplied as standard with a flush lock handle and finished in Surfmist White, ready for installation.

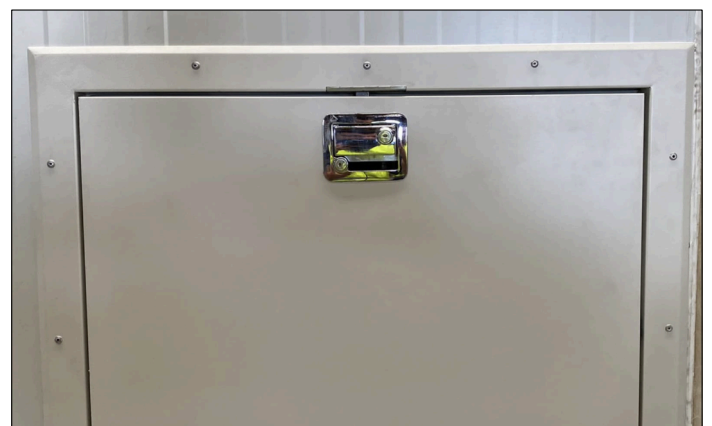

For more information please visit our website:
www.lathamsteeldoors.com.au or give us a call on +61 415 310 911

Latham's
STEEL DOORS AUSTRALIA