

## Size (mm)

External Frame	710, 860 & 1010 × 2050*2 (1490, 1790 & 2090 × 2095 Frame)
Finish	White powder coat from stock

## **Frame Extensions**

Expanding Side Panels	+5-40mm, +50-85mm
Overhead Panels	+25-300mm

## **Steel Air Vent Door & Frame**


A highly secure double steel vented door. Available in a range of air relief grilles, these louvre doors are perfect for buildings that require extra air flow and ventilation.

Finished in a heavy duty polyester powder coat, these doors are suitable for external use.



Door	Leaf

45mm Thickness
1.4mm Galvanised Steel
Honeycomb core
None
Nylon Self Adhesive V-Seal
90mm Depth
1.4mm Galvanised Steel
Nylon Self Adhesive V-Seal
10 Fixing Points
None
3 Stainless Steel Ball Bearing
4 pcs
Genuine ST8 HOOPLY™ Lock
3 Shoot Bolts Top & Bottom
UAP Standard Trade Lock
Genuine HOOPLY™ Side Locks
30dB
2.88

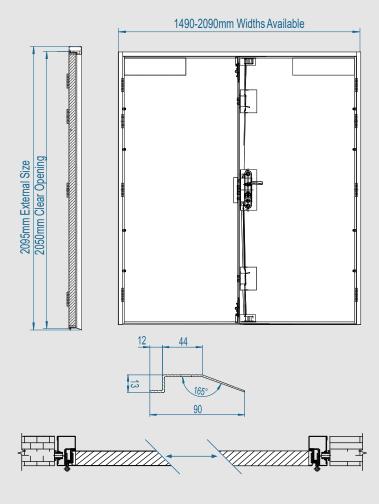

Our Double Steel Air Vent Doors are pre-installed with air relief grilles to promote airflow and ventilation whilst maintaining a high level of security. Offering up to 50% air flow, they are suitable for boiler rooms, plant rooms and server rooms.

These doors are fitted with our industry-leading multi point locking system and are some of the strongest air vent doors available in Australia.

Manufactured from galvanised steel with a fully welded construction, these doors include a secure multi point locking mechanism, 3 secure ball bearing hinges and 4 security dog bolts, your property is a lot safer with a Latham's steel door.









## **Customisations Available**









