

Overview

Size (mm)

External Frame	Door Leaf	Clear Opening
890 x 2095	820 x 2040	-
990 x 2095	920 x 2040	-
1090 x 2095	1020 x 2040	-

COLORBOND® Options

Surfmist White

Fixing/Installation

Pre-drilled holes with screws to fix to RHS frame

Donga Door

Our Donga Doors have been designed specifically for easy installation in Donga accommodations, modular buildings, steels frame buildings, sheds, mining and industrial facilities.

They are supplied as standard with a high quality flush handle, Dormakaba lever handle or knob as standard, and finished with a heavy duty polyester Surfmist White powder coat.

CERTIFIED TO THE CYCLONIC REGION D AUSTRALIAN STANDARD (AS/NZS 1170.2:2011).



Door Leaf

Door Depth 45mm Thickness

Material & Gauge 0.8mm galvanised steel

Insulation Rockwool (Mineral Wool)

Door Frame

Frame Depth 90mm Depth


Material & Gauge 1.4 mm Galvanised steel

Hinge

Hinge Qty & Type 4 Stainless Steel Ball Bearing Hinges

Lock

Main Lock Flush Lock

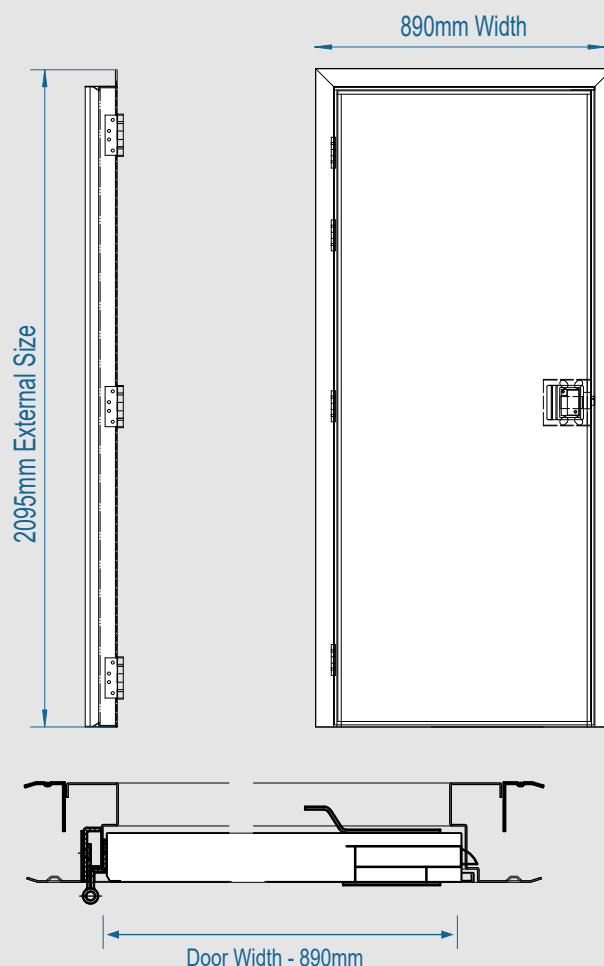

Our Donga Doors are made of 0.8mm galvanised steel door skins and 1.4mm galvanised frames, and they come with three stainless steel ball-bearing hinges. Built with Rockwool (Mineral Wool) insulation, and 3 stainless steel butt hinges hold the leaf in the frame.

These doors are built to last and come with weather and draught-proof seals as standard. Dormakaba lever handle or knob is provided as standard.

The increased rigidity and overall strength of our Donga Door has contributed to a successful Cyclonic Region D Rating (AS/NZS 1170.2:2011).



Surfmist White

Dormakaba Push Bar and Knob Options



Flush Lock Option

For more information please visit our website:
www.lathamsteeldoors.com.au or give us a call on +61 415 310 911